


- ✓ Flange for easy installation
- ✓ Seal failure warning, through weep holes
- ✓ Maintenance free
- ✓ Ceramic seals


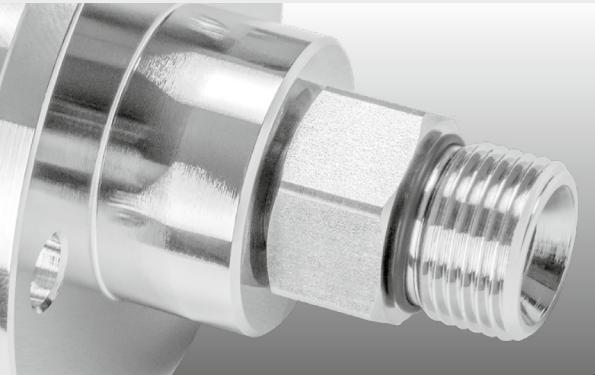


## Application

High rpm, self rotating applications, surface cleaners, parts washers, tire cleaners

### TECHNICAL DATA

<b>Pressure</b>	170 bar (17 MPa)
<b>Temperature</b>	5°C - 120°C
<b>RPM</b>	max. 2'000 rpm
<b>Body</b>	DXF: brass, nickel plated DXFI: stainless steel
<b>Inner part</b>	stainless steel
<b>Seal</b>	ceramic
<b>Bearing</b>	2x radial ball bearings 1x thrust ball bearing
<b>Throughput medium</b>	pH 3 - 12 10 µm filtered 20 bar compressed air

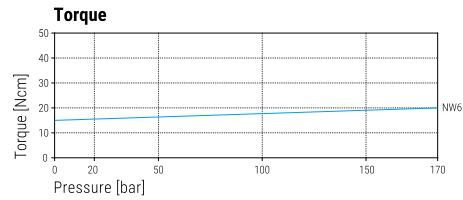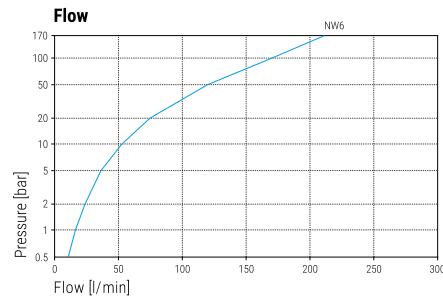

### DXF

Part No.	Part No.	G1 (F)	G2 (M)	NW	SW1	SW2	L1	L2	Weight
38.001	38.011	G1/4" F	G1/4" M	6	22	19	37	11	320 g
38.003	38.013	G1/4" F	G3/8" M	6	22	19	38	12	330 g
38.101	38.111	G3/8" F	G1/4" M	6	22	19	37	11	350 g
38.103	38.113	G3/8" F	G3/8" M	6	22	19	38	12	360 g

Part No.	Part No.	G1 (F)	G2 (F)	NW	SW1	SW2	L1	L2	Weight
38.002	38.012	G1/4" F	G1/4" F	6	22	19	39	340 g	
38.004	38.014	G1/4" F	G3/8" F	6	22	22	41	350 g	
38.102	38.112	G3/8" F	G1/4" F	6	22	19	39	320 g	
38.104	38.114	G3/8" F	G3/8" F	6	22	22	41	340 g	

Part No.	G1 (QV)	G2 (M)	NW	SW1	SW2	L1	L2	L3	Weight
38.201	M21x1.5 M	G1/4" M	6	19	19	37	11	12	330 g
38.203	M21x1.5 M	G3/8" M	6	19	19	38	12	12	340 g
38.251	M22x1.5 M	G1/4" M	6	20	19	37	11	12	340 g
38.253	M22x1.5 M	G3/8" M	6	20	19	38	12	12	350 g

### DXF 90°

Part No.	Part No.	G1 (F)	G2	NW	SW1	SW2	L1	L2	Weight
38.301	38.311	G1/4" F	G1/4" M	6	22	19	37	11	330 g
38.303	38.313	G1/4" F	G3/8" M	6	22	19	38	12	340 g
38.302	38.312	G1/4" F	G1/4" F	6	22	19	40	-	340 g
38.304	38.314	G1/4" F	G3/8" F	6	22	19	41	-	350 g

Part No.	G1 (F)	G2 (M)	NW	SW1	SW2	L1	L2	Weight
38.401	G3/8" F	G1/4" M	6	22	19	37	11	430 g
38.403	G3/8" F	G3/8" M	6	22	19	38	12	440 g

Part No.	G1 (QV)	G2 (M)	NW	SW1	SW2	L1	L2	L3	Weight
38.503	M21x1.5 M	G3/8" M	6	22	19	38	12	12	430 g
38.553	M22x1.5 M	G3/8" M	6	22	19	38	12	12	430 g

36.901 Seal kit NW 6

### Legend

M = metric thrust, ..M = male, F = female, G = gas pipe thrust, R = gas pipe thrust conical, QV = quick connects  
SV = profile ring fitting, D = diameter, L = length, NW = nominal width, SW = wrench size