


- ✓ Saltwater resistant
- ✓ With check valve
- ✓ Quadruple bearing system
- ✓ Carbide seal system
- ✓ Stainless steel

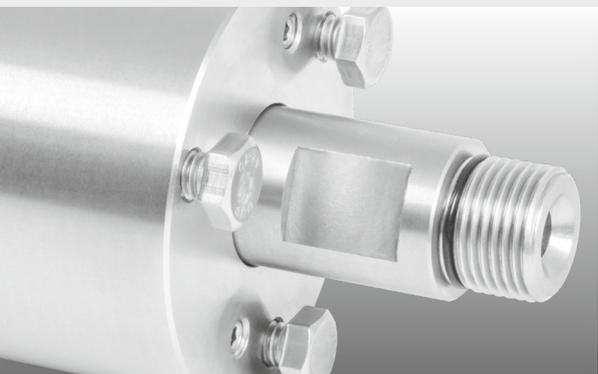

### Application

Underwater application (saltwater/freshwater), high rpm/pressure, thrust and radial forces

#### TECHNICAL DATA




**Pressure** 350 bar (35 MPa)  
**Temperature** 120°C  
**RPM** max. 2'000 rpm

**Body** stainless steel


**Inner part** stainless steel  
**Seal** carbide

**Bearing** stainless steel  
 2x radial ball bearings  
 2x thrust ball bearings

**Throughput medium** pH 3 - 12  
 10 µm filtered  
 20 bar compressed air

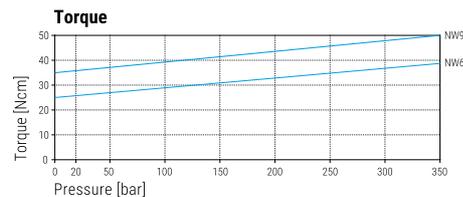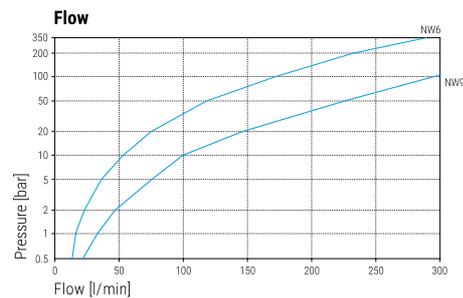

Check valve



#### DYKI

Part No.	G1 (F)	G2 (M)	NW	SW1	L1	L2	L3	D1	D2	Weight
54.001	G1/4" F	G1/4" M	6	16	71	107	10	55	20	1150 g
54.103	G3/8" F	G3/8" M	6	16	71	107	12	55	20	1150 g
54.603	G3/8" F	G3/8" M	9	16	73	109	12	55	20	1160 g

36.916	Seal kit NW 6
36.917	Seal kit NW 9

Legend

M., = metric thrust, ..M = male, F = female, G = gas pipe thrust, R = gas pipe thrust conical, QV = quick connects  
 SV = profile ring fitting, D = diameter, L = length, NW = nominal width, SW = wrench size